THE LENA V. RARICK SUB-DIV.

OF LOTS No. 1117-1118 AND PART OF LOT 1119. SOUTH ADD. TO THE CITY OF NEW LEXINGTON, OHIO.

JUNE 1949
SCALE 1"=50'
-o- indicates iron pin monuments

SURVEYED & PLOTTED BY
Paul Dumond
LANCASTER, O.

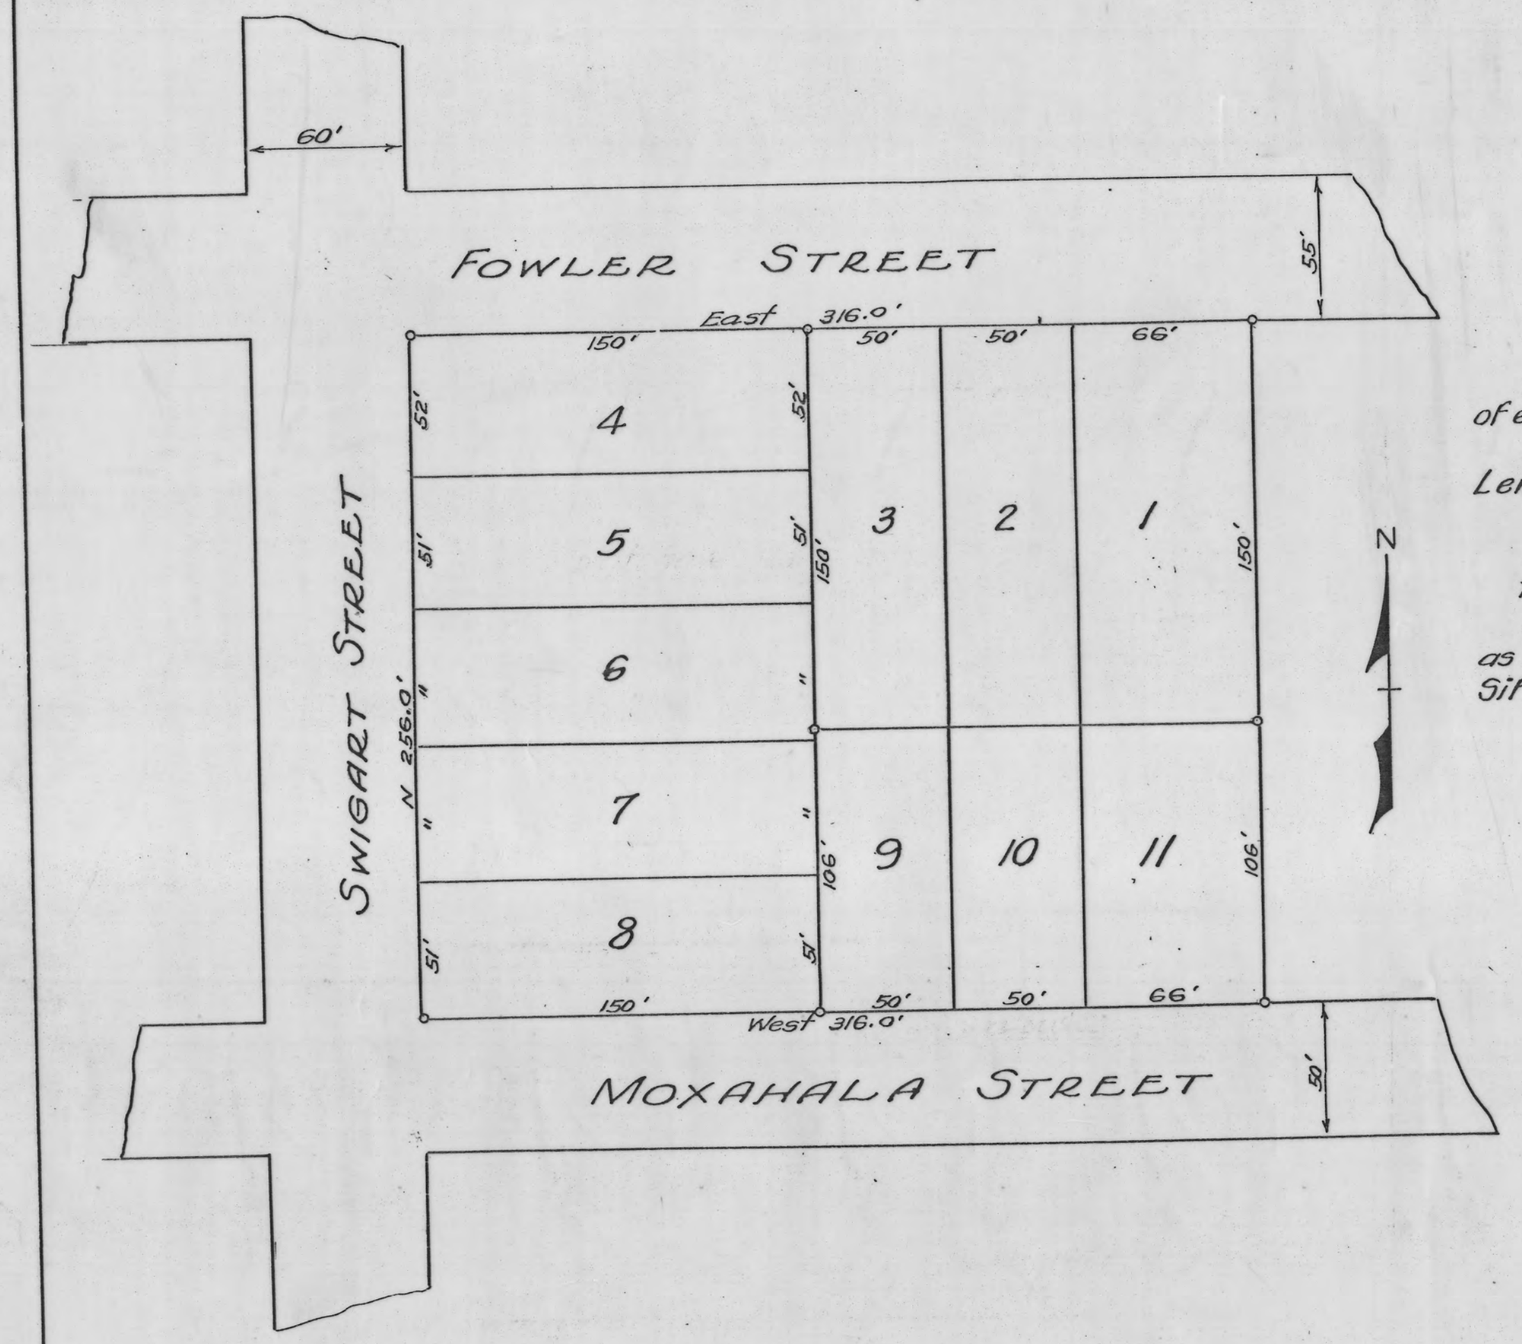

The lots are as represented on the plat with the length and width of each shown in feet and decimals of a foot.
The lots are numbered from 1 to 11 inclusive and are owned by Lena Rarick, a widow.

All streets shown on this plat have been heretofore dedicated to public use.
I hereby certify that the plat hereon shown with iron pin monuments as indicated is correct as surveyed by me assisted by Raymond Sifford and Jack Langwasser.

Paul Dumond
Reg. Surveyor Ohio #1775

Lancaster Ohio, June 4 1949
Know all men by these presents that I, Lena Rarick the owner of the land delineated on this plat do hereby acknowledge the making and signing of this plat to be my own free will, for the uses and purposes hereon expressed.

Witness
P. L. Van Atta
Stanley Van Atta

Owner
Lena V. Rarick
_____

State of Ohio, County of Perry.
Be it remembered that on the 4 day of June 1949 before me a notary public within and for said county personaly came Lena Rarick a widow who acknowledged the signing of the of the foregoing certificate to be her voluntary act for the uses expressed thereon
In testimony whereof I have hereunto set my hand and affixed my official seal the day and year aforesaid

P. L. Van Atta
Notary Public, Perry Co. O.

NOTARIAL SEAL

Transfered on the tax duplicate this 4 day of August 1949
E. L. Everlands
AUDITOR PERRY CO.

Fee $15.00

#30161
This plat received for record this 4 day of August 1949
Placed on plat record this 13 day of September 1949

Paul Snyder
RECORDER, PERRY CO.

DESCRIPTION

Being all of lots 1117 & 1118 and 76 Ft. off of the west side of lot 1119 in South Addition to New Lexington, Ohio, and more fully described as follows: Beginning at an iron pin monument at the S.E. corner of the intersection of Fowler Street and Swigart Street; thence east 316 Ft. to an iron pin, thence south 256 Ft. to an iron pin; thence west 316 Ft. to an iron pin; thence north 256 Ft. to the place of beginning.