PB 5 P 209

CENTERLINE PLAT
PER-757-2.913 (1.81)
SECTION 33, TOWNSHIP 17 NORTH, RANGE 16 WEST
HOPEWELL TOWNSHIP
PERRY COUNTY, OHIO

metric units

F0800200

Instrument 200400004061
Filed for Record in
PERRY COUNTY, OHIO
BARBARA J. FOX
06-25-2004 At 12:12 pm.
PLAT 43.20

HORIZONTAL SCALE IN METERS 0 20 50 150

FEDERAL PROJECT NO.	BRO-6405 (3)
PID NO.	10182
STATE JOB NO	053140

CENTERLINE PLAT
PER-757-2.913 (1.81)

1 / 4

16 / 19

EXISTING ℄ CURVE DATA
Δ = 41°54'37" LT.
R = 300.000 m (984.25')
T = 114.890 m (376.94')
L = 219.442 m (719.95')
M = 19.842 m (65.10')
E = 21.247 m (69.71')
LC = 214.582 m (704.01')

POST FD
PROPERTY CORNER
N.W. CORNER
S.W. QUARTER SEC. 33

QUARTER SECTION LINE
754.646 m (2475.87')
S85°46'54"E

BEGIN PROJECT
STA. 2+910
S.L.D. 2.910

℄ OF SURVEY & CONSTRUCTION
S.R 757

STA. 2+933.147
℄ S.R. 757

N36°54'51"W

3+044.11

3+000

2+940

P.T. STA. 2+944.658

2+880

2+820

TRIBUTARY TO PAINTER CREEK

70.369 m (230.87')
S85°46'54"E

END PROJECT
STA. 2+930.
S.L.D. 2.930

2+694.249

N4°59'46"E

2+760

P.C. STA. 2+725.215

QUARTER SECTION LINE

N4°21'37"E

S.W. QUARTER SEC. 33
S.E. QUARTER SEC. 33

STA. 2+760.891
3.134 m RT.
(10.28')

STA. 2+890.419
53.482 m RT.
(175.47')

STA. 2+895.941
57.483 m RT.
(188.59')

℄
408.9395 m
(1341.67')
S85°46'54"E

¾" IRON PIN FD
PROPERTY CORNER
STA. 2+806.873
437.184 m RT.
(1434.33')

BASIS FOR BEARINGS

ALL BEARINGS SHOWN ARE FOR PROJECT USE ONLY. THESE BEARINGS ARE TO AN ASSUMED MERIDIAN AND ARE USED TO DELINEATE ANGLES ONLY.

NOTE: THE EXISTING RIGHT OF WAY WIDTH AND LOCATION WERE DETERMINED USING:

1952- 60.00' RIGHT-OF-WAY ACQUIRED FOR TWP. RD. #69 AS RECORDED IN VOL'S 160/411, 160/407 & 160/414

1956- REROUTING OF S.R. 757 APPROVING 3.72 MILES OF TWP. RD #69 TO BECOME S.R. 757

I HEREBY CERTIFY THAT THIS PLAT IS A TRUE DELINEATION OF A SURVEY PERFORMED BY THE OHIO DEPARTMENT OF TRANSPORTATION IN 1996 BY DISTRICT 5, OHIO DEPARTMENT OF TRANSPORTATION.

THE ESTABLISHMENT OF THE PROPERTY LINES AND EXISTING RIGHT OF WAY LINES SHOWN ON THIS PLAN AS OF THIS DATE WAS PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION.

Thomas E. Andrews 06-21-04
THOMAS E. ANDREWS PS6964 DATE

STATE OF OHIO
THOMAS E. ANDREWS
S-6964
REGISTERED
PROFESSIONAL SURVEYOR

CENTERLINE REFERENCE MONUMENTS ARE SHOWN ON STANDARD CONSTRUCTION DRAWINGS RM-1.1M (REV. 6/95). THE PLACING OF THE MONUMENTS SHALL BE DONE UNDER THE DIRECTION OF A PROFESSIONAL SURVEYOR, BY THE HIGHWAY CONTRACTOR DURING CONSTRUCTION.
THE MONUMENTS SHALL BE SET WITHIN A TOLERANCE NO GREATER THAN +/- 6mm (0.02'). ANY ALTERATIONS SHALL HAVE PRIOR APPROVAL IN WRITING FROM THE DISTRICT RIGHT OF WAY ADMINISTRATOR/SUPERVISOR. UPON SETTING THE MONUMENTS, A WRITTEN STATEMENT SHALL BE PROVIDED TO THE DISTRICT RIGHT OF WAY SUPERVISOR STATING THE LOCATION OF MONUMENTS SET, SIGNED AND SEALED BY A PROFESSIONAL SURVEYOR.

CENTERLINE REFERENCE MONUMENTS (⊗) ARE TO BE PLACED AT THE FOLLOWING LOCATIONS

QUANTITY	STATION	OFFSET	LT./RT.
1	2+860.000	5.486 m (18.00')	RT.
1	2+860.000	4.572 m (15.00')	LT.
2	P.T. 2+944.658	7.000 m (22.97')	LT./RT.
2	P.C. 2+725.215	7.000 m (22.97')	LT./RT.
TOTAL TO BE CARRIED TO THE GENERAL SUMMARY =			6

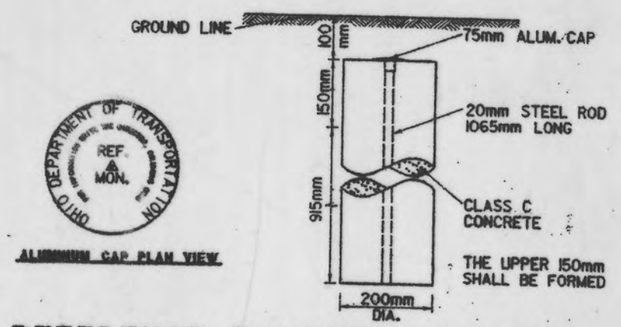

REFERENCE MONUMENT DETAILS

LEGEND
⊗ ℄ REFERENCE MONUMENT
o IRON PIN FOUND
○ POST FOUND

REV	DATE	DESCRIPTION

COMPLETION DATE:

Slot H 354
RECEIVED 6-25-04
RECORDED 6-25-04, 19
BOOK 5 PAGE 209
Barbara Fox
COUNTY RECORDER

PB 5 P 209